

Novaflex®

Chemical Transfer Hose

UHMW Chemical Suction & Discharge Hose

Novaflex 4700

A lightweight flexible chemical transfer hose designed for almost every common industrial chemical used in industry today. Non-staining UHMW tube.

Specifications


Tube: Clear Ultra High Molecular Weight polyethylene
Reinforcement: Multiple plies of high tensile textile with dual helix

Cover: Green abrasion resistant EPDM, steel helix with multiple plies of tire cord

Length: 100ft

Temperature Range: -40°F (-40°C) to +250°F (+121°C)

Non-stock orders: (other color hose covers: blue, black, purple, yellow, white, grey) are available and require a 400ft minimum order per I.D.

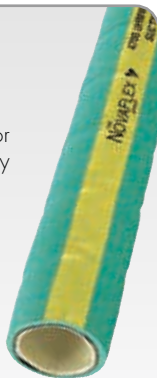

UHMW Crush Resistant Chemical Suction & Discharge Hose

Novaflex 4705

Special Kink & Crush Resistant version of 4700 design, utilizing a multi-ply construction with dual special monofilament helix rods. Excellent for use in those demanding abusive transfer applications. To utilize the maximum temperature rating of the hose always install permanently attached couplings.

Specifications

Tube: Ultra high molecular weight polyethylene
Reinforcement: Multiple plies of tire cord with dual monofilament helix, static wire

Cover: Green EPDM Rubber

Temperature: -40°F to +212°F (Intermittently to 250°F)

Consult Chemical Resistance Chart.

Teflon® is a registered trademark of DuPont



When coupling chemical and higher risk hoses, Novaflex® recommends the use of crimp couplings using interlocking crimp ferrules.

Part No.	I.D.	O.D.	Plies	MBR (in)	Vacuum Hg	WP psi	WT LBS/FT
4700CU-07500-00	¾"	1.20	2	3.5	29"	250	0.58
4700CU-01000-00	1"	1.55	2	4	29"	250	0.63
4700CU-01250-00	1¼"	1.80	2	4.5	29"	250	0.80
4700CU-01500-00	1½"	2.05	2	5	29"	250	1.06
4700CU-02000-00	2"	2.56	2	8	29"	250	1.33
4700CU-02500-00	2½"	3.08	2	10	29"	200	1.78
4700CU-03000-00	3"	3.61	2	16	29"	200	2.12
4700CU-04000-00	4"	4.65	2	24	29"	200	2.83
4700CU-06000-00	6"	7.07	4	30	29"	200	4.95

Part No.	I.D.	O.D.	MBR (in)	VAC (Hg)	Plies	WP psi	WT LBS/FT
4705CU-00750-00	¾"	1.35	4	29"	2	200	0.40
4705CU-01000-00	1"	1.60	4	29"	2	200	0.49
4705CU-01500-00	1½"	2.10	5	29"	2	200	0.64
4705CU-02000-00	2"	2.75	8	29"	2	200	1.28
4705CU-03000-00	3"	3.79	10	29"	2	200	1.92

***WARNING!** Elevated temperatures can change the chemical resistance rating of 4705. Check the chemical resistance charts published by Novaflex® to verify that the chemical to be transferred is rated for use with the UHMWP tube at the temperature & concentrations listed. Most chemicals become more aggressive the higher the temperature, reducing the ability of the tube material to withstand them. Compatibility information is available from Novaflex. If no data exists, it is the users responsibility to determine if the hose is compatible with the chemical to be transferred. **Never use Novaflex 4705 above the ratings listed by Novaflex®.**

The information provided within is for informational purposes only. We have made every effort to ensure the accuracy of the provided information and assume no responsibility for any loss or damage due to errors or omissions or to the use or misuse of any information supplied. It is impossible to test all products under all conditions to which they might be subjected in the field. It is therefore the buyer and/or end users' responsibility to test all products under the conditions that duplicate the service conditions prior to installation. All improvements, all specifications are subject to change without prior notice. It is the buyer and/or end users' responsibility to review our complete **Terms and Conditions of Sale** located on our web sites at: www.novaflex.com | www.z-flex.com | www.flexmaster.com.

03.2020

IN USA

North Carolina

449 Trollingwood Road
Haw River, NC 27258
tel (336)578-2161
fax (336)578-5554
800-334-4270

New Jersey

1024 Industrial Drive
West Berlin, NJ 08091
tel (856)768-2275
fax (856)768-2385
800-225-0215

Indianapolis

7812 Moller Road
Indianapolis, IND 46268
tel (317)334-1444
fax (317)334-1535
800-526-6288

IN CANADA

Ajax, Ontario

555 Beck Crescent
Ajax, ON L1Z 1C9
tel (905)686-5200
fax (905) 686-8349
800-563-3539

IN U.K.

Bromborough, Wirral

18 Plantation Park 2, Power Road
Bromborough, Wirral UK CH62 3QT
tel 44(0)151-334-0873
fax 44(0)151-334-7145
www.novaflex.co.uk Email: sales@novaflex.co.uk