

Novaflex®

Water Removal & Hydrant Services

Novaflex 3265

Corrugated Dock Hose

Specially designed for barge unloading where flexibility and ease of handling are required. Special tire cord reinforcement with dual wire helix and corrugated cover enhances the characteristics.

Specifications

Tube: NBR
 Reinforcement: Polyester tire cord, dual wire helix.
 Cover: Black NBR/PVC corrugated
 Ends: Straight.
 Length 100 ft (max)
 Temperature range: -30°F (-35°C) to +200°F (+93°C)

Fuel Compatibility:

Ethanol up to E85 Biodiesel up to B20. Meets USCG requirements




Novaflex 2161

Water Removal and Hydrant Services

Premium quality heavy duty hose designed for suction and discharge applications commonly found in water removal and hydrant service on fire trucks.

Specifications

Tube: SBR
 Reinforcement: Multiple plies of polyester tire cord with helix
 Cover: Corrugated black EPDM cover
 Length: up to 100 ft
 Temperature Range: -40°F (-40°C) to 180°F (82°C)
 Hose comes with 6" cuffed ends.
 Meets or exceeds NFPA #189 & 1901 requirements

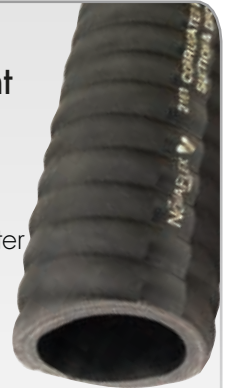

Part No.	I.D.	O.D.	Plies	MBR (in)	VAC (Hg)	WP psi	WT LBS/FT
3265BF-06000-00	6	7.20	4	30	30"	225	7.20
3265BF-08000-00	8	9.30	6	42	30"	225	10.84
3265BF-10000-00	10	11.50	6	60	30"	225	13.40
3265BF-12000-00	12	13.80	8	72	30"	225	17.25

Part No.	I.D.	O.D.	Plies	WP psi	Min Qty	WT LBS/FT
2161BS-02500-00	2	3.04	2	150	4	2.42
2161BS-03000-00	2½	3.54	2	150	4	2.9
2161BS-04000-00	3	4.54	2	150	2	3.47
2161BS-04500-00	4	4.687	4	159	2	5.2
2161BS-05000-00	5	5.54	4	150	2	5.88
2161BS-06000-00	6	6.58	4	150	2	7.36

The information provided within is for informational purposes only. We have made every effort to ensure the accuracy of the provided information and assume no responsibility for any loss or damage due to errors or omissions or to the use or misuse of any information supplied. It is impossible to test all products under all conditions to which they might be subjected in the field. It is therefore the buyer and/or end users' responsibility to test all products under the conditions that duplicate the service conditions prior to installation. All improvements, all specifications are subject to change without prior notice. It is the buyer and/or end users' responsibility to review our complete **Terms and Conditions of Sale** located on our web sites at: www.novaflex.com | www.z-flex.com | www.flexmaster.com.

10.2020

IN USA

North Carolina

449 Trollingwood Road
 Haw River, NC 27258
 tel (336)578-2161
 fax (336)578-5554
 800-334-4270

New Jersey

1024 Industrial Drive
 West Berlin, NJ 08091
 tel (856)768-2275
 fax (856)768-2385
 800-225-0215

Indianapolis

7812 Moller Road
 Indianapolis, IN 46268
 tel (317)334-1444
 fax (317)334-1535
 800-526-6288

IN CANADA

Ajax, Ontario

555 Beck Crescent
 Ajax, ON L1Z 1C9
 tel (905)686-5200
 fax (905) 686-8349
 800-563-3539

IN U.K.

Bromborough, Wirral

18 Plantation Park 2, Power Road
 Bromborough, Wirral UK CH62 3QT
 tel 44(0)151-334-0873
 fax 44(0)151-334-7145
 www.novaflex.co.uk Email: sales@novaflex.co.uk