

Nova-Green[™] Hose for Terra Seeding, Bark and Mulch Blowing

This lightweight urethane alternative to cumbersome PVC hose is designed specifically for the landscaping market. Novaflex 's Nova-Green™ all urethane tube provides superior abrasion resistance and excellent flexibility.



Email: sales@novaflex.com Website: ww.novaflex.com



Novaflex®

Nova-Green™ Urethane Hose

Nova-Green™ Urethane Hose

A lightweight urethane alternative to cumbersome PVC hose. Designed specifically for the landscaping market. Nova-Green™ all urethane tube provides superior abrasion resistance and excellent flexibility. The hose features a smooth interior with a uniform .045″ wall gauge for even abrasion resistance throughout. The exposed rigid helix allows the hose to drag easily across surfaces when the hose is fully charged while providing protection to the hose wall.

Applications

- Terra-seeding
- Bark Blowing
- Mulch Blowing


Construction

Material: UV stabilized urethane wall, rigid plastic helix Diameters: 4" (other diameters available upon request)

Lengths: 50ft and 100 ft lengths


Temperature range: -50°F (-45°) to +200°F (+93°C)

Color: Clear wall with green helix

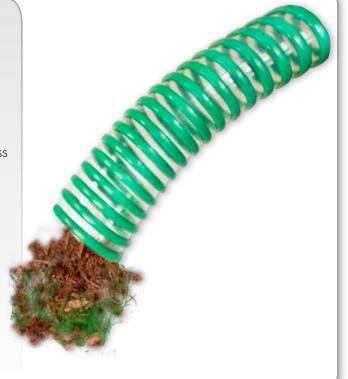

I.D.	Length	Part No.	Vacuum inch H.g.	Bend Radius (in)	Working Pressure/ PSI
2"	50′, 100′	9NFNOVAGREEN02	30 Hg	3	35
3″	50′, 100′	9NFNOVAGREEN03	30 Hg	5	30
4"	50′, 100′	9NFNOVAGREEN04	30 Hg	7.5	21
5″	50′, 100′	9NFNOVAGREENO5	23 Hg	8.5	18
6"	50′	9NFNOVAGREEN06	23 Hg	10	16

Negative Effects of Abrasion on Elastomers

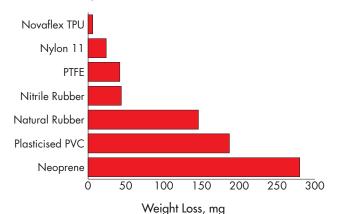

The information provided within is for informational purposes only. We have made every effort to ensure the accuracy of the provided information and assume no responsibility for any loss or damage due to errors or omissions or to the use or misuse of any information supplied. It is impossible to test all products under all conditions to which they might be subjected in the field. It is therefore the buyer and/or end users' responsibility to test all products under the conditions that duplicate the service conditions prior to installation. All improvements, all specifications are subject to change without prior notice. It is the buyer and/or end users' responsibility to review our complete **Terms and Conditions of Sale** located on our web sites at: www.novaflex.com | www.fexmaster.com.

IN USA

North Carolina 449 Trollingwood Road Haw River, NC 27258 tel (336)578-2161 fax (336)578-5554 800-334-4270

New Jersey

1024 Industrial Drive West Berlin, NJ 08091 tel (856)768-2275 fax (856)768-2385 800-225-0215

Indianapolis

7812 Moller Road Indianapolis, IND 46268 tel (317)334-1444 fax (317)334-1535 800-526-6288

IN CANADA

Ajax, Ontario 555 Beck Crescent Ajax, ON L1Z 1C9 tel (905)686-5200 fax (905) 686-8349 800-563-3539

IN U.K.

Bromborough, Wirral

18 Plantation Park 2, Power Road Bromborough, Wirral UK CH62 3QT tel 44(0)151-334-0873 fax 44(0)151-334-7145

www.novaflex.co.uk Email: sales@novaflex.co.uk



Email: sales@novaflex.com Website: www.novaflex.com