

# Leaf Collection

## Polyurethane Hose



### SF-TPUHW

**An Economical Alternative to Cumbersome Rubber Hose**

**Features:** Polyurethane wall for superior abrasion resistance. UV stabilized for outdoor use. Lightweight and good flexibility with smooth interior for optimum flow.

**Applications:** Leaf collection equipment, medium duty material handling, plant debris collection.

[sales@novaflex.com](mailto:sales@novaflex.com) | [www.novaflex.com](http://www.novaflex.com)

**NOVAFLEX**  
PROVIDING HOSE & DUCT SOLUTIONS



### SF-TPUX

With this duct's special molecular bonded construction there is less turbulence with maximum flow efficiency. The lightweight, flexible duct will perform under the toughest conditions including low temperatures, oil and ozone and fungus. Constructed without wire, is extremely flexible with excellent shape retention. Highly compressible for easy storage and transportation. Constructed of FDA approved material.



#### Applications:

Sawdust collection, pellet, material transfer. Excellent low temperature flexibility. Abrasion, oil, ozone and fungus resistant

#### Specifications:

Temperature range: -65°F to +200°F Intermittent  
Standard lengths 25ft & 50 ft to 8" dia, 25' 10" dia and up. Standard diameters: 1½" to 12" and half inch sizes 1½", 2½", 3½", 4½", 5½".  
Standard color: Clear with clear helix

### SF-TPR (Thermo Plastic Rubber)

Molecularly bonded high temperature TPR. Exceeds temperature limit of most plastics and is an economical alternative to speciality fabric duct.

SF-TPR provides outstanding performance and fatigue resistance. Smooth interior design allows for superior flow and maximum efficiency.

Manufactured with RoHS compliant material.

#### Applications:

Excellent flex fatigue resistance. Light duty material handling. Hot exhaust extraction. Medium duty chemical fume removal.

#### Specifications:

Temperature range: -40°F to +275°F continuous, 300°F intermittent.  
Lengths: 25 ft & 50 ft. Diameters: 1½" to 24"  
Color: TPRW All black, or black with yellow wearstrip. TPRX black with white wearstrip.  
*(Available with and without encapsulated wire)*



### SF-TPU (Wall Gauge 0.030")

All extruded, molecularly bonded urethane duct with encapsulated wire offers maximum abrasion resistance and superior tear resistance. Smooth inner wall reduced turbulence for maximum flow efficiency. Encapsulated wire protects surfaces from scuffing. Manufactured with FDA approved materials



#### Applications:


Sawdust collection, Lavatory waste, Pellet, material transfer. Excellent low temperature flexibility. Abrasion, oil, ozone and fungus resistant.

#### Specifications:

Temperature range: -65°F to +200°F. Intermittent  
Standard lengths: 25 & 50 ft.  
Standard diameters: 1½" to 24". Standard color: Clear with clear helix  
*(Available with and without encapsulated wire)*

### SF-LFC - Leaf Collector (SF-TPUW-HW Heavy Wall 0.045")

An economical alternative to cumbersome rubber hose. Polyurethane wall for superior abrasion resistance. UV stabilized for outdoor use. Lightweight, good flexibility, smooth interior for optimum flow. Encapsulated wire helix.

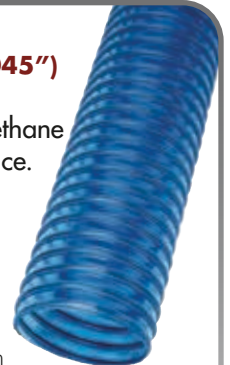

#### Applications:

Leaf collection equipment. Medium duty material handling, plant debris collection.

#### Specifications:

Temperature range: -65°F to +200°F Intermittent  
Standard lengths 25ft & 50 ft to 8", 25ft to 10" diam. & up. Standard diameters: 2" to 20"  
Standard color: Blue with blue wearstrip.  
*(Available in 0.060" gauge clear 8" to 14" diam.)*

05.2026

## IN USA

### North Carolina

449 Trollingwood Road  
Haw River, NC 27258  
tel (336)578-2161  
fax (336)578-5554  
800-334-4270

### New Jersey

1024 Industrial Drive  
West Berlin, NJ 08091  
tel (856)768-2275  
fax (856)768-2385  
800-225-0215

### Indianapolis

7812 Moller Road  
Indianapolis, IND 46268  
tel (317)334-1444  
fax (317)334-1535  
800-526-6288

## IN CANADA

### Ajax, Ontario

555 Beck Crescent  
Ajax, ON L1Z 1C9  
tel (905)686-5200  
fax (905) 686-8349  
800-563-3539

## IN U.K.

### Bromborough, Wirral

18 Plantation Park 2, Power Road  
Bromborough, Wirral UK CH62 3QT  
tel 44(0)151-334-0873  
fax 44(0)151-334-7145  
www.novaflex.co.uk Email: sales@novaflex.co.uk



Email: sales@novaflex.com  
Website: www.novaflex.com